


**OPTIONS** 

NOTE:

## **CASCADE ELITE**

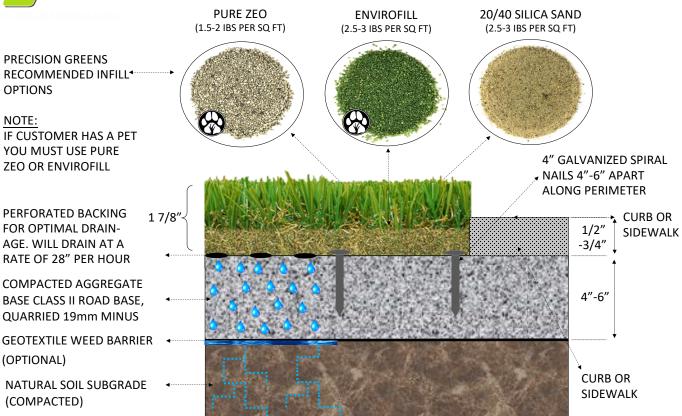

## **PRODUCT SPECS:**

(OPTIONAL)

FIBER TYPE: SHAPED POLYETHYLENE WAVEBLADE 17/8" PILE HIEGHT: FIBER TOLERANCE: HEAVEY FOOT TRAFIC FIBER TECHNOLOGY: WAVEBLADE FIBER COLOR: **EMERALD GREEN / FOREST GREEN** THATCH COLOR: DRY YELLOW / FERN GREEN 3/8" TUFT GAUGE: STICH RATE: 15 PER 3 7/8" FACE WEIGHT: 76 OZ / SQ YD BACKING: PERFORATED POLYURETHANE 104 OZ / PER SQ YD TOTAL WEIGHT: ROLL SIZE: 15' X 75' **ROLL WEIGHT:** 812.5 IBS 28' OF RAIN PER HOUR DRAINAGE WEIGHT: SEEMING DIFFICULTY: HIGH





RESIDENTIAL LANDSCAPE SYSTEM

## **INSTALLATION STEPS:**

- 1. EXCAVATE MINIMUM OF 4" SOD AND SOIL
- 2. BACKFILL WITH 2 SEPARATE 2" LIFTS OF CLASS II ROAD BASE, QUARRIED 19mm MINUS AND COMPACT TO 90%
- 3. INSTALL GRASS AS PER THE TURF DESIGN AND SEAMED WITH THE ADJACENT PIECES RUNNING IN THE SAME DIRECTION; SEEMS SHOULD BE GLUED WITH NORDOT ADHESIVE #34N2 AND SEEM CLOTH, NOT ADHISIVE TAPE
- 4. SECURE GRASS TO BASE WITH 4" GALVANIZED SPIRAL NAILS ALONG THE PERIMETER (4"-6" APART)
- 5. POWER BROOM GRASS AND ENSURE ALL GRASS FIBERS ARE STANDING.
- 4. EVENLY SPREAD 2 SEPARATE LAYERS OF INFILL; FIRST LAYER 1.5 IBS PER SQ FT AND POWER BROOM; SECOND LAYER1 IBS PER SQ FT AND FINAL POWER BROOM
- 5. ONCE GRASS IS INSTALLED TO SPEC, SEEMED, AND INFILLED, SOAK THE ENTIRE AREA WITH WATER MAKING SURE ALL INFILL HAS SETTLED INTO THE BASE OF THE GRASS

