




EMERALD PRO

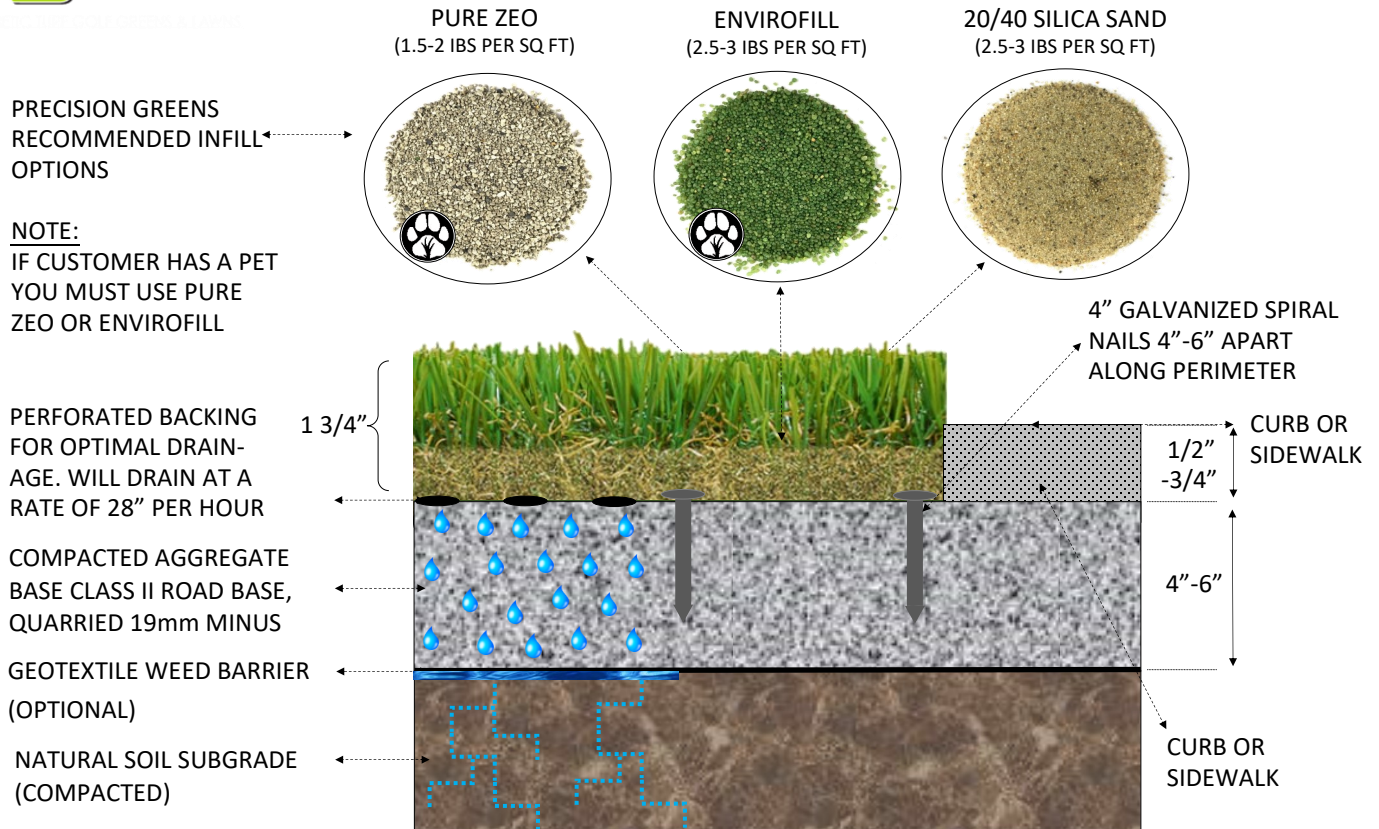

PRODUCT SPECS:

FIBER TYPE:	SHAPED POLYETHYLENE WAVEBLADE
PILE HEIGHT:	1 3/4"
FIBER TOLERANCE:	HEAVEY FOOT TRAFIC
FIBER TECHNOLOGY:	NANOWAVE
FIBER COLOR:	EMERALD GREEN / FIELD GREEN
THATCH COLOR:	DRY YELLOW / FERN GREEN
TUFT GAUGE:	3/8"
STICH RATE:	16 PER 3 7/8"
FACE WEIGHT:	80 OZ / SQ YD
BACKING:	PERFORATED POLYURETHANE
TOTAL WEIGHT:	108 OZ / PER SQ YD
ROLL SIZE:	15' X 75'
ROLL WEIGHT:	844 IBS
DRAINAGE WEIGHT:	28' OF RAIN PER HOUR
SEEMING DIFFICULTY:	HIGH

INSTALLATION STEPS:

1. EXCAVATE MINIMUM OF 4" SOD AND SOIL
2. BACKFILL WITH 2 SEPARATE 2" LIFTS OF CLASS II ROAD BASE, QUARRIED 19mm MINUS AND COMPACT TO 90%
3. INSTALL GRASS AS PER THE TURF DESIGN AND SEAMED WITH THE ADJACENT PIECES RUNNING IN THE SAME DIRECTION; SEAMS SHOULD BE GLUED WITH NORDOT ADHESIVE #34N2 AND SEEM CLOTH, NOT ADHESIVE TAPE
4. SECURE GRASS TO BASE WITH 4" GALVANIZED SPIRAL NAILS ALONG THE PERIMETER (4"-6" APART)
5. POWER BROOM GRASS AND ENSURE ALL GRASS FIBERS ARE STANDING.
4. EVENLY SPREAD 2 SEPARATE LAYERS OF INFILL; FIRST LAYER 1.5 IBS PER SQ FT AND POWER BROOM; SECOND LAYER 1 IBS PER SQ FT AND FINAL POWER BROOM
5. ONCE GRASS IS INSTALLED TO SPEC, SEEMED, AND INFILLED, SOAK THE ENTIRE AREA WITH WATER MAKING SURE ALL INFILL HAS SETTLED INTO THE BASE OF THE GRASS



RESIDENTIAL LANDSCAPE SYSTEM

