


OPTIONS

NOTE:

GARDEN PRO

PURE ZEO

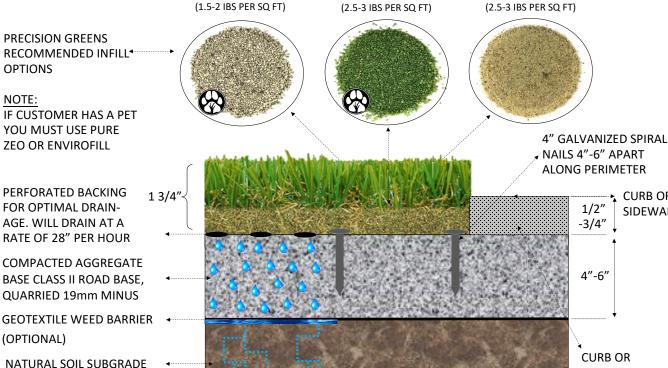

ENVIROFILL

PRODUCT SPECS:

(COMPACTED)

(OPTIONAL)

FIBER TYPE: SHAPED POLYETHYLENE 1 3/4" PILE HIEGHT: FIBER TOLERANCE: HEAVEY FOOT TRAFIC FIBER TECHNOLOGY: NANOWAVE FIBER COLOR: **EMERALD GREEN / MOSS GREEN** THATCH COLOR: DRY YELLOW / FERN GREEN 3/8" TUFT GAUGE: STICH RATE: 15 PER 3 7/8" FACE WEIGHT: 74 OZ / SQ YD BACKING: PERFORATED POLYURETHANE TOTAL WEIGHT: 102 OZ / PER SQ YD ROLL SIZE: 15' X 75' **ROLL WEIGHT:** 797 IBS DRAINAGE WEIGHT: 28' OF RAIN PER HOUR SEEMING DIFFICULTY: HIGH



RESIDENTIAL LANDSCAPE SYSTEM

INSTALLATION STEPS:

- 1. EXCAVATE MINIMUM OF 4" SOD AND SOIL
- 2. BACKFILL WITH 2 SEPARATE 2" LIFTS OF CLASS II ROAD BASE, QUARRIED 19mm MINUS AND COMPACT TO 90%

20/40 SILICA SAND

- 3. INSTALL GRASS AS PER THE TURF DESIGN AND SEAMED WITH THE ADJACENT PIECES RUNNING IN THE SAME DIRECTION; SEEMS SHOULD BE GLUED WITH NORDOT ADHESIVE #34N2 AND SEEM CLOTH, NOT ADHISIVE TAPE
- 4. SECURE GRASS TO BASE WITH 4" GALVANIZED SPIRAL NAILS ALONG THE PERIMETER (4"-6" APART)
- 5. POWER BROOM GRASS AND ENSURE ALL GRASS FIBERS ARE STANDING.
- 4. EVENLY SPREAD 2 SEPARATE LAYERS OF INFILL; FIRST LAYER 1.5 IBS PER SQ FT AND POWER BROOM; SECOND LAYER1 IBS PER SQ FT AND FINAL POWER BROOM
- 5. ONCE GRASS IS INSTALLED TO SPEC, SEEMED, AND INFILLED, SOAK THE ENTIRE AREA WITH WATER MAKING SURE ALL INFILL HAS SETTLED INTO THE BASE OF THE GRASS



CURB OR

SIDEWALK

SIDEWALK